

IPC-AT8340PL



Features

- HD 4MP resolution, image clarity, detail;
- Auto switch color to black/IR-CUT, achieve monitoring day and night;
- Various information superimposed(ID、IP、DDNS sever)
- Advanced H.265/H.264 video compression,super low rate and high definition image;
- Support multiple mobile remote monitoring (iOS, Android);
- Multi-browser access (IE, Chrome, Firefox, Safari);
- Auto electronic shutter time,adjust to different environment;
- Support web, CMS, center platform management software MYEYE, provide SDK Development.
- Support conform to ADVR/NVR,and support ONVIF;


Scenarios:

Apply to roads, warehouses, underground parking, bars, pipes, parks and other places.

Model:

IPC-AT8340PL

Dimension:

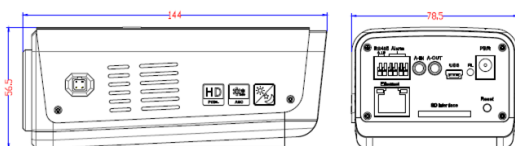

Parameters:

Model	IPC-AT8340PL
Network camera	
Sensor	1/3"OV4689 ultra-low illumination CMOS
Minimum illumination	Color 0.01Lux @(F1.2,AGC ON),0 LUX with IR Black & White 0.001 Lux @ (F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	NO
Lens interface	CS
Day and night	Support IR-CUT
Compression Standard	
Video	H.265/H.264 High Profile, JPEG snapshot
Output rate	0.1Mbps ~10Mbps
Audio	G.711a
Image	
Max. image size	2592*1520
Frame Rate	Main stream :4MP 2592*1520@15fps; 3MP 2048*1536@25fps Sub stream :1280*720; 704*576 @25fps
Image Settings	Saturation, brightness and contrast can be adjusted through IE or Client
Network functions	
Storage	By network
Intelligent Alarm	Motion detection, video loss, cable break, IP address conflict
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,PPPoE,SMTP,NTP (HTTPS,SIP,802.1x,IPv6Optional)
Other	Anti-flicker, dual-stream, heartbeat, password protection
Interface	
Communication	1*RJ45 10M/100M adaptive Ethernet port
General Specifications	
Temperature and humidity	-10℃~60℃, humidity less than 90% (non-condensing)
Power supply	DC12V±10%
Dimension	144mm*78.5mm*56.5mm
Weight	About 450g