

IPC-ED5413PE-IR2



**Features**

- HD 960P resolution, image clarity, detail;
- Auto switch color to black/IR-CUT,achieve monitoring day and night;
- Various information superimposed(ID、 IP、 DDNS sever)
- Advanced video compression,super low rate and high definition image;
- Support multiple mobile remote monitoring (iOS, Android);
- Multi-browser access (IE, Chrome, Firefox, Safari);
- Auto electronic shutter time,adjust to different environment;
- Support web, CMS, center platform management software MYEYE, provide SDK Development.
- Support conform to ADVR/NVR,and support ONVIF;


**Scenarios:**

Apply to roads, warehouses, underground parking, bars, pipes, parks and other places.

**Model:**

IPC-ED5413PE-IR2

**Dimension:**

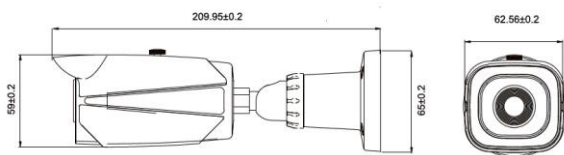

**Parameters:**

|                               |  |
|-------------------------------|--|
| Model                         | IPC-ED5413PE-IR2   |
| <b>Network camera</b>         |  |
| Sensor                        | 1/3" Star-light CMOS sensor  |
| Minimum illumination          | Color 0.0001Lux @(F1.2,AGC ON),0 LUX with IR<br>Black & White 0.0001 Lux @ (F1.2,AGC ON),0 LUX with IR |
| Shutter                       | 1/50(1/60)s to 1/10,000s   |
| Lens                          | 3.6mm@F1.8 HD lens(2.8mm,6mm optional)   |
| Lens interface                | M12  |
| Day and night                 | Support IR-CUT   |
| <b>Compression Standard</b>   |  |
| Video                         | H.264High Profile, JPEG snapshot   |
| Output rate                   | 32 Kbps~6Mbps  |
| Audio                         | G.711A   |
| <b>Image</b>                  |  |
| Max. image size               | 1280*960   |
| Frame Rate                    | 50Hz:20fps (1280*960) , 25fps (1280*720)<br>60Hz:20fps (1280*960) , 30fps (1280*720)                   |
| Image Settings                | Saturation, brightness and contrast can be adjusted through IE or Client                               |
| <b>Network functions</b>      |  |
| Storage                       | By network   |
| Intelligent Alarm             | Motion detection, video loss, cable break, IP address conflict   |
| Protocol                      | TCP/IP,HTTP,DHCP,DNS,DDNS,PPPoE,SMTP,NTP (HTTPS,SIP,802.1x,IPv6Optional )                              |
| Other                         | Anti-flicker, dual-stream, heartbeat, password protection  |
| <b>Interface</b>              |  |
| Communication                 | 1*RJ45 10M/100M adaptive Ethernet port   |
| <b>General Specifications</b> |  |
| Temperature and humidity      | -10℃~60℃, humidity less than 90% (non-condensing)  |
| Power supply                  | DC12V±10%  |
| Protection class              | IP66   |
| Infrared radiation            | IR lamb: 25 "IR2":20-30m;  |
| Dimension                     | 65mm*63mm*210mm  |
| Weight                        | Around430g   |