

IPC-EM25413PE-IR5

1.3 million HD IR Bullet IP Camera



Features


- HD 960P resolution, image clarity, detail;
- Auto switch color to black/IR-CUT,achieve monitoring day and night;
- Various information superimposed(ID、 IP、 DDNS sever)
- Advanced video compression,super low rate and high definition image;
- Support multiple mobile remote monitoring (iOS, Android);
- Multi-browser access (IE, Chrome, Firefox, Safari);
- Auto electronic shutter time,adjust to different environment;
- Support web, CMS, center platform management software MYEYE, provide SDK Development.
- Support conform to ADVR/NVR,and support ONVIF;

Scenarios:

Apply to roads, warehouses, underground parking, bars, pipes, parks and other places.

Model:

IPC-EM25413PE-IR5

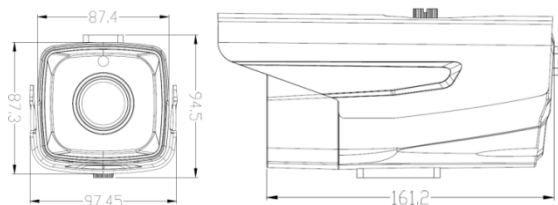

Parameters:

Model	IPC-EM25413PE-IR5
Network camera	
Sensor	1/3" IMX225 ultra low illumination CMOS sensor
Minimum illumination	Color 0.0001Lux @(F1.2,AGC ON),0 LUX with IR Black & White 0.0001 Lux @ (F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	3.6mm@F1.8 HD lens(6mm,8mm,12mm optional)
Lens interface	M12/CS
Day and night	Support IR-CUT
Compression Standard	
Video	H.264 High Profile, JPEG snapshot
Output rate	32 Kbps~6Mbps
Audio	G.711a
Image	
Max. image size	1280*960
Frame Rate	50Hz:20fps(1280*960),25fps(1280*720) 60Hz:20fps(1280*960),30fps(1280*720)
Image Settings	Saturation, brightness and contrast can be adjusted through IE or Client
Network functions	
Storage	By network
Intelligent Alarm	Motion detection, video loss, cable break, IP address conflict
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,PPPoE,SMTP,NTP (HTTPS,SIP,802.1x,IPv6Optional)
Other	Anti-flicker, dual-stream, heartbeat, password protection
Interface	
Communication	1*RJ45 10M/100M adaptive Ethernet port
General Specifications	
Temperature and humidity	-10℃~60℃, humidity less than 90% (non-condensing)
Power supply	DC12V±10%
Protection class	IP67
Infrared radiation	"IR5":50-60m;
Dimension	195.5mm*94.5mm*97.5mm
Weight	Around 535g