

# IPC-EZ8340PL-IR3



### Feature:

- High resolution 4MP、3MP, image presented vivid and clear
- Support automatic color change/IR-CUT, achieving day and night non-stop monitoring;
- Support various information superimposed (such as: ID、IP、DDNS and so on);
- Advanced video compression, achieving ultra-low bit-rate, superb high-definition picture quality;
- Support various mobile long-distance monitoring (iPhone, Windows Mobile, BlackBerry, Symbian, Android);
- Support multiple web browsers(IE、Chrome、Firefox、Safari);
- Support auto electronic shutter, adapt to different monitoring environment;
- Web and CMS supporting、central management software MYEYE, providing SDK development;
- Support HVR/NVR connection, support ONVIF standard;


### Application:

Apply for road, warehouse, underground parking lot, bar, pipeline and somewhere where require HD images but with dark light and poor sunshine.

### Model:

## IPC-EZ8340PL-IR3

### Dimension:

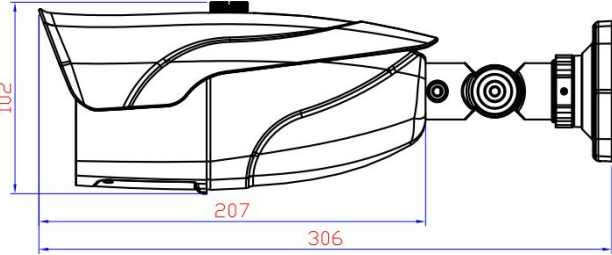

### Specifications:

Model	IPC-EZ8340PL-IR3
<b>Camera</b>	
Image sensor	1/3" OV 4689 Low illumination CMOS
Min.illumination	Color 0.01Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.001Lux @ (F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	HD special lens 3.6mm-10mm Varifocal lens
Lens mount	∅ 14
Day/night	Support IR-CUT
<b>Compression</b>	
Video compression	H.265/H.264,support dual stream,AVI; 1~30f/s variable
Bite rate	32Kbps~10Mbps
<b>Image</b>	
Resolution	2592*1520
Frame rate	Main stream:4MP 2592*1520@15fps; 3MP 2048*1536@25fps sub-stream: 1280*720,704*576 @25fps
Image setting	Saturation, brightness, contrast can be adjusted via IE browser or client
<b>Network</b>	
Storage	Network storage
Intelligent alarm	Motion detection, video loss, network break, IP conflict
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP (HTTPS,SIP,802.1x,IPv6 option)
Basic	anti-flicker, dual-stream, heartbeat, password protection
<b>Interface</b>	
Network interface	1 RJ45 10M/100M adaptive Ethernet port
<b>General</b>	
Working condition	-10℃~60℃, humidity less than 90% (non-condensing)
Power supply	DC12V±10%
Waterproof	IP66
IR distance	"IR3":30-40 meters
Dimension	306mm*118mm*102mm
Weight	1100g