

IPC-HE5320PL-IR2



Features


- HD 1080P resolution, image clarity, detail;
- Auto switch color to black/IR-CUT,achieve monitoring day and night;
- Various information superimposed(ID、 IP、 DDNS sever)
- Advanced video compression,super low rate and high ddefinition image;
- Support multiple mobile remote monitoring (iOS, Android);
- Multi-browser access (IE, Chrome, Firefox, Safari);
- Auto electronic shutter time,adjust to different environment;
- Support web, CMS, center platform management software MYEYE, provide SDK Development.
- Support conform to ADVR/NVR,and support ONVIF;

Scenarios:

Apply to roads, warehouses, underground parking, bars, pipes, parks and other places.

Model:

IPC-HE5320PL-IR2

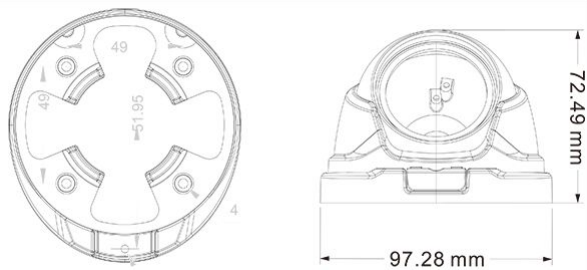

Parameters:

Model	IPC-HE5320PL-IR2
Camera	
Image sensor	1/2.8"Low illumination CMOS sensor
Min.illumination	Color 0.01Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.001 Lux @ (F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	3.6mm@F2.0 (2.8mm,6mm optional)
Lens mount	M12
Day/night	Support IR-CUT
Compression	
Video	H.264,support dual stream,AVI;
Bite rate	32 Kbps~6Mbps
Audio	G.711a
Image	
Max.image	1920*1080
Frame rate	50Hz:1920*1080@25fps;704*576@25fps 60Hz:1920*1080@30fps;704*576@30fps
Image setting	Saturation, brightness and contrast are adjustable
Network	
Storage	Network storage
Intelligent alarm	Motion detection, video loss, cable break, IP address
protocol	TCP/IP,HTTP,DHCP,DNS,DDNS, PPPoE,SMTP,NTP
Basic	anti-flicker, dual-stream, heartbeat, password protection
Interface	
Network	1 *RJ45 10M/100Madaptive ethernet port
Audio interface	1ch RCA audio input
General	
Working	-10℃~60℃ , humidity less than 90%
Power supply	DC12V±10%
Protection range	IP66
IR lamb	IR lamb: 24
IR distance	"IR2" :20-30 meters;
Dimension	Φ98mm*73mm
Weight	About 290g