

## IPC-HR5110PE-IR2



### Feature:

- High resolution 720P, image presented vivid and clear
- Support automatic color change/IR-CUT, achieving day and night non-stop monitoring
- Support various information superimposed (such as: ID、IP、DDNS and so on)
- Advanced video compression, achieving ultra-low bit-rate, superb high-definition picture quality
- support various mobile long-distance monitoring (iPhone, Windows Mobile, BlackBerry, Symbian, Android)
- Support multiple web browsers (IE、Chrome、Firefox、Safari)
- support auto electronic shutter, adapt to different monitoring environment
- web and CMS supporting、central management software MYEYE, providing SDK development.
- Support HVR/NVR connection, support ONVIF standard


### Scenarios:

Apply for road, warehouse, underground parking lot, bar, pipeline and somewhere where require HD images but with dark light and poor sunshine.

### Model:

## IPC-HR5110PE-IR2

### Dimension:

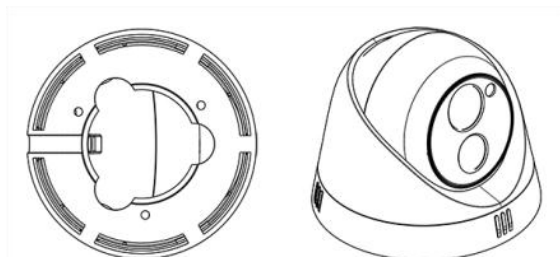

### Parameters:

Model	IPC-HR5110PE-IR2
<b>Camera</b>	
Image sensor	1/4" CMOS sensor
Min. illumination	Color 0.1Lux @(F1.2, AGC ON), 0 LUX with IR B/W 0.01 Lux @(F1.2, AGC ON), 0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	HD professional lens 3.6mm @ F1.8 (6mm option)
Lens mount	M12
Day/night	Support IR-CUT
<b>Compression</b>	
Video compression	H.264 HighProfile, JPEG snapshot
Bite rate	32 Kbps~6Mbps
Audio compression	G.711a
<b>Image</b>	
Max. image resolution	1280*720
Frame rate	50Hz: 25fps (1280*720) 60Hz: 25fps (1280*720)
Image setting	Saturation, brightness and contrast are adjustable through IE browser or client software.
<b>Network</b>	
Storage	Network storage
Intelligent alarm	Motion detection, video loss, cable break, IP address conflicts
protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP (HTTPS, SIP, 802.1x, IPv6 option)
Basic	anti-flicker, dual-stream, heartbeat, password protection
<b>Interface</b>	
Network interface	1* RJ45 10M/100M adaptive ethernet port
Audio interface	No
<b>General</b>	
Working condition	-10℃~60℃, humidity less than 90% (non-condensing)
Power supply	DC12V±10%
Protection range	IP66
IR distance	"IR2": 20-30 meters
Dimension	Φ 110mm*88mm
Weight	约 202g