

## IPC-RA5110PE-W-IR1


**Features**

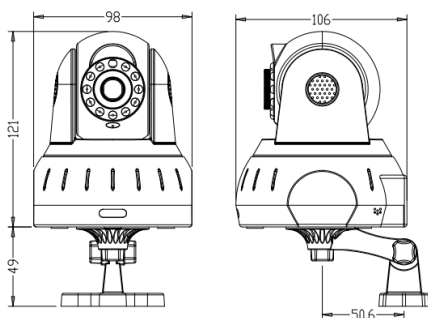
- HD 720P resolution, image clarity, detail;
- Auto switch color to black/IR-CUT, achieve monitoring day and night;
- Various information superimposed (ID、IP、DDNS sever)
- Advanced video compression, super low rate and high definition image;
- Support multiple mobile remote monitoring (iOS, Android);
- Multi-browser access (IE, Chrome, Firefox, Safari);
- Auto electronic shutter time, adjust to different environment;
- Support web, CMS, center platform management software MYEYE, provide SDK Development.
- Support conform to ADVR/NVR, and support ONVIF;

**Scenarios:**

Apply to home, shops and other places

**Model:**

IPC-RA5110PE-W-IR1

**Dimension:**

**Parameters:**

Model	IPC-RA5110PE-W-IR1
Network camera	
Sensor	1/4" CMOS sensor
Minimum illumination	Color 0.1Lux @(F1.2,AGC ON),0 LUX with IR Black & White 0.01 Lux @( F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	HD special lens 4mm -6mmVarifocal lens
Lens interface	M12
Day and night	Support IR-CUT
Compression Standard	
Video	H.264 High Profile, JPEG snapshot
Audio	G.711a
Image	
Max. image size	1280*720
Frame Rate	50Hz:25fps (1280*960), (1280*720) 60Hz:30fps (1280*960), (1280*720)
Image Settings	Saturation, brightness and contrast can be adjusted through IE or Client
Network functions	
Storage	By TF and network
Intelligent Alarm	Motion detection, video loss, cable break, IP address conflict
Other	Anti-flicker, dual-stream, heartbeat, password protection
Interface	
Audio input	1*Micro
Audio output	1*3.5mm JACK
Communication	1*RJ45 10M/100M adaptive Ethernet port
Alarm input	1
Alarm output	1
Usb	1*usb(spread to3G/Wifi)
General Specifications	
Temperature and humidity	-10℃~60℃, humidity less than 90% (non-condensing)
Power supply	DC5V±10%
Infrared radiation	"IR1":10-20m;
Dimension	106mm*98mm*121mm
Weight	285g