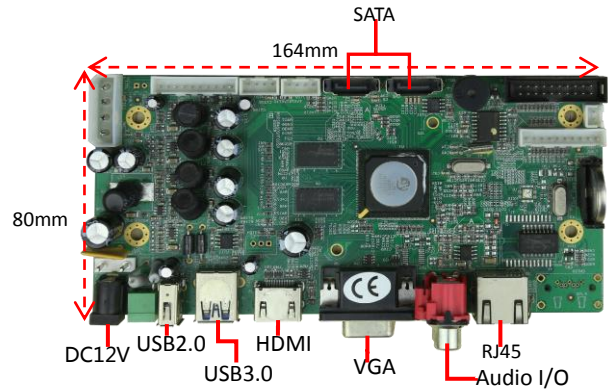


NBD7024T-P
32ch1080P NVR Board

Feature:

- Support HDMI VGA HD output;
- Support ONVIF;access third party;
- Support web, CMS, center platform management software MYEYE, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, IP searches, Alarm Center, etc.);


二、技术参数:
三、订货型号: NBD7024T-P

	Model	NBD7024T-P
System	Main processor	Hi3535
	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8/16/24/32
Video	Video input (IP)	8*5M/16*4M/32 (24fps)、16、8*1080P/32*960P/16*720P
	Access bandwidth	192Mbps
	Forwarding bandwidth	192Mbps
	Video compression	H.264
	Display quality	Max 1280*1080
	Playback quality	5M/4M/1080P/960P/720P
	Decode	2*5M/4*4M/4、8、8*1080P/8*960P/16*720P
Audio	Motion detection	Support(depend on camera)
	Audio compression	G.711A
Record & playback	Intercom	support
	Recording mode	Manual>Alarm>Dynamic Detection>Timing
	Local payback	2*5M/4*4M/4、8、8*1080P/8*960P/16*720P
	Search mode	Search by Time/Calendar/Event/Channel
	Record storage	HDD、Network
External interface	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video output	1ch VGA, 1ch HDMI HD output
	Audio I/O	1/1
	Alarm I/O	0/0(4/1)
	Network interface	1*RJ45 10M/100M/1000M Adaptive Ethernet port+4ch WIFI
	USB interface	1*USB2.0 ports,1*USB3.0 ports
	HDD	2 SATA(Up to 8TB for each disk)
	ESATA	No
Serial interface	No	
Other	ONVIF	Support
	Power supply	12V/4A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0°C-+55°C, Humidity:10%-90%RH, Atm:86kpa-106kp
	Dimension	164mm*80mm
	Weight	A total of about 130g