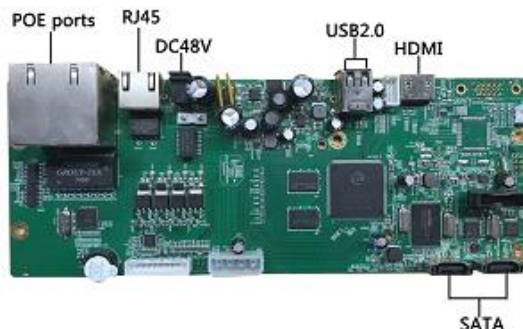


NBD8904T-Q
Features:

- support HDMI 4K output;
- Support web, CMS, center platform management software MYEYE, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3G,WIFI,IP searches etc.);
- Visit remotely,built-in ARSP,achieve start up by one step.


Technical Parameters:
Model: NBD8904T-Q

	Model	NBD8904T-Q
System	Main processor	Hi3798M
	Operating System	Embedded Linux
	System Resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Operator Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8
Video	Video input (IP)	4*4K/4*5M/4*4M /8*1080P
	Video standards	PAL(625TVL,50f/s); NTSC(525TVL,60f/s)
	Video compression	H.265/H.264
	Display quality	Max:4K
	Playback quality	4K/5M/4M/1080P
	Decode	1*4K/2*5M/4*4M/4*1080P
Audio	Motion detection	Depend on camera
	Audio compression	G.711A
Record & playback	intercom	Unsupport
	Recording mode	Manual>Alarm>Video Detection>Continuous
	Local Playback	1*4K/2*5M/4*4M/4*1080P
Storage &	Search mode	search by Time/calendar/event/channel
	Record Storage	HDD 、 network
Interface	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video output	1ch HDMI HD output(can be extended to support VGA)
	Audio I/O	0/0
	Alarm I/O	0/0
	Network interface	1* 10M/100M Adaptive Ethernet port,4 POE ports
	USB interface	2*USB2.0 port
other	Hard disk	1*SATA(extensible 2 SATA interface) (Up to 8TB for each disk)
	PTZ control	Control PTZ device by network
	ONVIF	Support
	Power supply	48V/1.5A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0°C- + 55°C , Humidity:10% – 90%RH , Atm:86kpa – 106kp
	dimension	230mm(H)*172mm(W)
weight	Around 150g	