

NVR6008D-PL(T)




Features:

- Support multiple high-definition network camera access;up to 1080P
- Support VGA, HDMI 1080P full HD output simultaneously;
- Support web, CMS, MYEYE platform, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL,3g,wifi, IP searches, Alarm Center,etc.);
- Support ONVIF & GB28181;
- Support several mobile system (iOS, Android);
- Support multiple web browser access (IE, Chrome, Firefox, Safari);
- More than twenty languages;
- Perfect protection circuit, unique triple watchdog function;
- Visit remotely,built-in ARSP,remote monitoring by one step

Model:

NVR6008D-PL(T)

Interface:

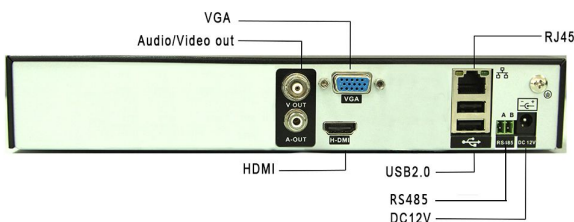

Parameters:

	Model	NVR6008D-PL(T)
System	Main processor	Hi3520D
	Operating system	Embedded Linux
Interface	Operator interface	16-bit true color graphic menu operation interface,support mouse operation
	Preview	1/4/8
Audio& video	Video input	8、4*1080P/8、4*720P
	Decode	H.264
	Monitor quality	Max 1920*1080
	Playback quality	1080P/720P
	Standard	Video: PAL, NTSC; Audio:G.711A
	Motion detection	Support(depend on camera)
	Intercom	Unsupport
Video playback	Record mode	Manual>Alarm>Dynamic Detection>Timing
	Local playback	2*1080P/4*720P
	Search mode	Search by time/calendar/event/channel
	Record storage	HDD, Network
	Backup mode	Network backup,USB hard disk,USB burner,SATA burner
External interface	Video out	1ch BNC, 1ch VGA, 1ch HDMI
	Audio I/O	0/1
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M adaptive Ethernet port
	PTZ control	Control PTZ by network
	USB interface	2*USB2.0 ports
	HDD	2*SATA (Max 6 for each)
General	ONVIF	Support
	GB28181	Optional
	Work environment	Temperature:0℃-+55℃ , Humidity:10%—90%RH , Atm:86kpa—106kp
	Weight	Around 1.2KG
	Power supply	12V/2A
	Dimension	350(L)* 295mm(W)* 45mm(H)