

NVR7816D-F




Features:

- Support multiple high-definition network camera access; up to 1080P
- Support VGA, HDMI 1080P full HD output simultaneously;
- Support web, CMS, MYEYE platform, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3g,wifi,IP searches, Alarm Center,etc.);
- Support ONVIF & GB28181;
- Support several mobile system (iOS, Android);
- Support multiple web browser access (IE, Chrome, Firefox, Safari);
- More than twenty languages;
- Perfect protection circuit, unique triple watchdog function;
- Visit remotely,built-in ARSP,remote monitoring by one step

Model:

NVR7816D-F

Interface:

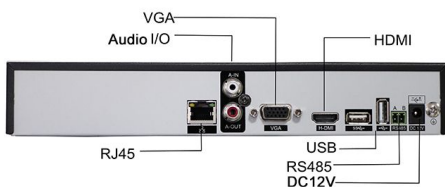

Parameters:

| | Model | NVR7816D-F |
|--------------------|---|--|
| System | Main processor | Hi3535 |
| | Operating system | Embedded Linux |
| Interface | Operator interface | 16-bit true color graphic menu operation interface,support mouse operation |
| | Preview | 1/4/8/16 |
| Audio&video | Video input | 4*5M/8*1080P/16*960P |
| | Decode | H.264 |
| | Monitor quality | Max 1920*1080 |
| | Playback quality | 5M/1080P/960P |
| | Standard | Video: PAL, NTSC; Audio:G.711A |
| | Motion detection | Depend on camera |
| Record & Backup | Intercom | Support |
| | Record mode | Manual>Alarm>Dynamic Detection>TimingDetection>Timing |
| | Local playback | 1*5M/4*1080P/4*960P |
| | Search mode | Search by time/calendar/event/channel |
| External interface | Record storage | HDD, network |
| | Backup mode | Network backup, USB hard disk, USB burner, SATA burner |
| | Video out | 1ch VGA, 1ch HDMI |
| | Audio I/O | 1/1 |
| General | Alarm I/O | 0/0 |
| | Network interface | 1*RJ45 10M/100M,Adaptive Ethernet port |
| | PTZ control | Control PTZ by network |
| | USB | 2*USB2.0,1*USB 3.0 ports |
| | HDD | 2* SATA (Max 6T for each) |
| | ONVIF | Support |
| GB28181 | Optional | |
| Work environment | Temperature:0°C-+55°C , Humidity:10%—90%RH , Atm:86kpa—106kpa | |
| Weight | Around 1.6KG | |
| Power supply | 12V/4A | |
| Dimension | 350mm(L)* 296.4mm(W)* 44mm(H) | |