

NVR7816T-F




Features:

- Support multiple high-definition network camera access; up to 1080P
- Support VGA full HD output;
- Support web, CMS, MYEYE platform, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3g,wifi,IP searches, Alarm Center,etc.);
- Support ONVIF & GB28181;
- Support several mobile system (iOS, Android);
- Support multiple web browser access (IE, Chrome, Firefox, Safari);
- More than twenty languages;
- Perfect protection circuit, unique triple watchdog function;
- Visit remotely,built-in ARSP,remote monitoring by one step

Model:

NVR7816T-F

Interface:

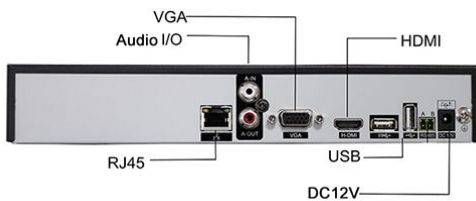

Parameters:

	Model	NVR7816T-F
System	Main processor	Hi3535
	Operating system	Embedded Linux
Interface	Operator interface	16-bit true color graphic menu operation interface,support mouse operation
	Preview	1/4/8/16
Audio&video	Video input	4*5M/8*1080P/16*960P
	Decode	H.264
	Monitor quality	Max 1920*1080
	Playback quality	5M/1080P/960P
	Standard	Video: PAL, NTSC; Audio:G.711A
	Motion detection	Depend on camera
Record & Backup	Intercom	Support
	Record mode	Manual>Alarm>Dynamic Detection>TimingDetection>Timing
	Local playback	1*5M/4*1080P/4*960P
	Search mode	Ssearch by time/calendar/event/channel
External interface	Record storage	HDD, network
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video out	1ch VGA, 1ch HDMI
	Audio I/O	1/1
General	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M ,Adaptive Ethernet port
	PTZ control	Control PTZ by network
	USB	2*USB2.0,1*USB 3.0 ports
	HDD	1 *SATA (Max 6T for each)
	ONVIF	Support
GB28181	Optional	
Work environment	Temperature:0℃-+55℃ , Humidity:10%—90%RH , Atm:86kpa—106kp	
Weight	Around 1KG	
Power supply	12V/2A	
Dimension	255(L)* 236mm(W)* 44mm(H)	