

NVR8032K-Q




Features:

- Support multiple high-definition network camera access;
- Support VGA ,HDMI 4K output ;
- Support web, CMS, MYEYE platform, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3g,wifi,IP searches, Alarm Center,etc.);
- Support GB28181 ;
- Support several mobile system (iOS, Android);
- Support multiple web browser access (IE, Chrome, Firefox, Safari);
- More than twenty languages;
- Perfect protection circuit, unique triple watchdog function;

Model:

NVR8032K-Q

Interface:

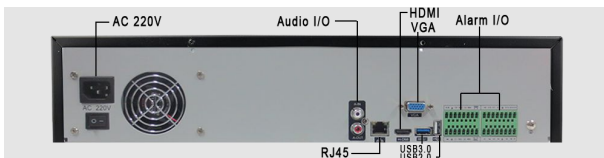

Parameters:

	Model	NVR8032K-Q
System	Main processor	Hi3536
	Operating system	Embedded Linux
Interface	Operator interface	16-bit true color graphic menu operation interface,support mouse operation
	Preview	1/4/8/16/24/32
Audio&video	Video input	24*5M/32*3M/16*1080P
	Decode	H.264/H.265
	Monitor quality	Max 4K
	Playback quality	5M/3M/1080P
	Standard	Video: PAL, NTSC; Audio:G.711A
	Motion detection	Depend on camera
	Intercom	Support
Record & Backup	Record mode	Manual>Alarm>Dynamic Detection>TimingDetection>Timing
	Local playback	4*5M/9*3M/16*1080P
	Search mode	Ssearch by time/calendar/event/channel
	Record storage	HDD, network
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
External interface	Video out	1chVGA,1ch HDMI
	Audio I/O	1/1
	Alarm I/O	16/4
	Network interface	1*RJ45 10M/100M/1000M ,Adaptive Ethernet port
	PTZ control	Control PTZ device by network
	USB	2*USB2.0 ,1*USB3.0 ports
	HDD	8*SATA(Max 6T for each)
General	ONVIF	Support
	GB28181	Optional
	Work	Temperature:0℃- +55℃ , Humidity:10% — 90%RH , Atm:86kpa— 106kp
	Weight	Around 6KG
	Power supply	ATX
	Dimension	443(L)* 427.5mm(W)* 92mm(H)