


**IPG-53H13PE-WK**

**Features:**

- Supports Wi-Fi, a key WPS function;
- Support Micro SD card, up to 32G;
- Support 3D DNR, DWDR;
- Support for mobile video surveillance (iOS, android);
- Support Web, CMS, platform management software MYEYE, Provide SDK ;
- Support cloud service, network penetration, alarm information pushed to phone ,etc.

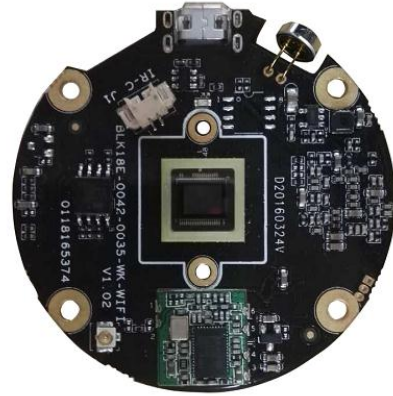

**Parameters:**

Specifications	IPG-53H13PE-WK
System Structure	Embedded RTOS design, dual-core 32-bit DSP (Hi3518E), pure hardware compression, watchdog;
Sensor	1.3M 1/2.8" low illumination CMOS sensor ; color 0.01Lux@F1.2, black/white 0.001Lux@F1.2;
Video compression	H.264, support dual-stream, AVI format; support stream 0.1M ~6Mbps adjustable; support frame rate from 1 to 30 frames / sec adjustable;
Image output	Main stream: 1280*960 (18fps) ,1280*720; sub-stream: 704*576;
Noise reduction	Support 2D/3D
Wide dynamic	Support digital
Network connection	Supports Wi-Fi, a key WPS function;
Hardware features	Support a key reset function
Signal interface	One photo resistance interface, one IR-CUT interface ,support photo resistance signal and IR-CUT links to IR
Audio interface	1ch input, electrical level 2Vp-p, impedance 1kΩ, support pickup input; 1ch output (Welded MIC interface), impedance 16Ω, 30mv output power, support to connect the headset or power amplifier
Audio processing	G.711 codec standard, supports two-way voice intercom, support audio and video synchronization;
Lightning Protection	Power lightning protection, in line with national standards GB/T17626.5, the international standard IEC61000-4-5.
Micro SD	Support
features	support WEB configure, support for OSD, support real-time video transmission, support mobile surveillance, support for mobile detection alarm center after the screen pop-up reminders and linkage; supports JPEG capture; support unified client remote monitoring software, MYEYE platform system applications; provide perfect the SDK development package;
ONVIF	Unsupport
Mobile monitoring	Support multiple mobile monitoring (iOS, Android)
Power	DC5V
dimension	Φ=50mm
Explain	Does not accept any custom.