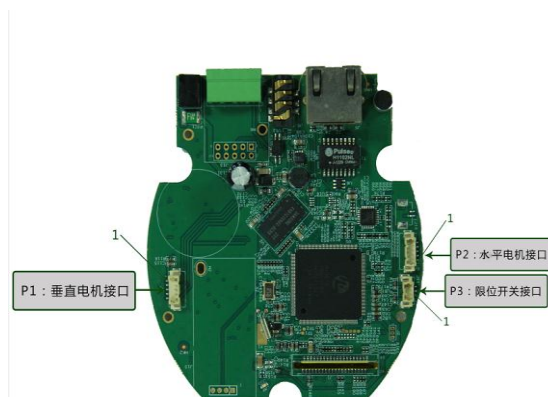


IPG-53H13PL-R

Features:

- 1/3" AR 0130 CMOS sensor;
- Main stream 1280*960;Sub stream 704*576;
- Support Micro SD card,up to 32G;
- Support ONVIF;
- Support for mobile video surveillance(iOS,android);
- Support Web, CMS, platform management software MYEYE,Provide SDK ;
- Support cloud service, network penetration, alarm information pushed to phone ,etc.


Parameters:

Model	IPG-53H13PL-R
System structure	Embedded RTOS,dual-core 32bit DSP(Hi3518C),pure hard compression ,watch dog
Sensor	1/3" AR 0130 CMOS sensor color 0.01Lux@F1.2,black/white 0.001Lux@F1.2
Video compression	H.264,support dual stream,AVI;0.1M~6Mbps variable;1~30f/s variable
Image output	Main stream: 1280*960, sub-stream: 704*576;
Audio interface	1ch input,electrical level 2Vp-p,impedance 1kΩ,support pickup input;1ch output, impedance 16Ω,30mv output power,support to connect the headset or power amplifier
Audio processing	G.711 standard compression,support two-way Bidirectional Talk,support for audio and video synchronization
Network	1 x RJ45, 10/100M, support RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
Alarm input	1 channel
Alarm output	1 channel
Motor interface	1 level motor interface,1 vertical motor interface,1 limit switch
SD card	Support,maximum 32G
Lightning Protection	Power lightning protection,in line with national standards GB/T17626.5,the international standard IEC61000-4-5.
Other function	Support WEB configure,support for OSD,support real-time video transmission, support mobile surveillance,support for mobile detection alarm center after the screen pop-up reminders and linkage;supports JPEG capture;support unified client remote monitoring software,MYEYE platform system applications;provide perfect the SDK development package;
ONVIF	support
Mobile monitoring	Support multiple mobile monitoring (iOS, Android)
Other	DC5V power input interface, restore the factory configuration button interface;