


IPG-53XF13PT-WPNS

1.3M low illumination WIFI Kit Wireline&Wi-Fi IP Module

Features:

- 1.3M resolution,clear and fine images;
- Supports Wireline、 Wi-Fi;
- Support 3D DNR, DWDR;
- Advanced H.264 video compression,Super low rate,high definition quality of image;
- Professional anti-lightning,conform to GB/T17626.5 and IEC61000-4-5

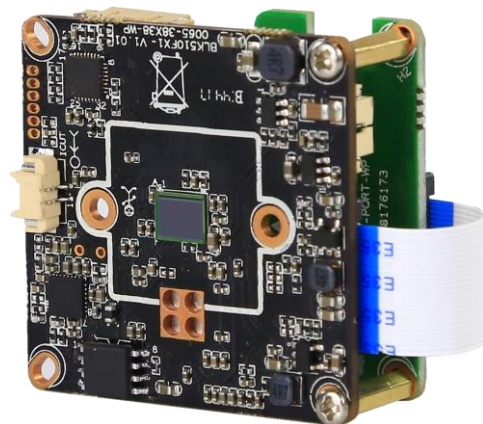

Parameters:

Model	IPG-53XF13PT-WPNS
System structure	Embedded RTOS, dual-core 32-bit DSP (XM510F),pure hard compression ,watch dog
Sensor	1.3M 1/3" H65 low illumination CMOS sensor,color 0.01Lux@F1.2,black/white 0.001Lux@F1.2
Video compression	H.264,support dual stream,AVI;0.1M~6Mbps variable;1~30f/s variable
Image output	Main stream:1280*960@25fps; sub-stream: 640*360@25fps
Shutter	1/50(1/60)s to 1/10,000s
Lens	No
Day and night	Support IR-CUT
Noise reduction	Support 2D/3D
Wide dynamic	Support
Auto iris	N/A
Audio compression	N/A
Audio interface	N/A
Network interface	1*RJ45 10/100M adaptive Ethernet port
Extension interface	N/A
Singal interface	One photo resistance interface,one IR-CUT interface ,support photo resistance signal and IR-CUT links to IR
PTZ	N/A
Motor interface	N/A
Alarm I/O	N/A
WIFI interface	Supports Wi-Fi
Reset interface	N/A
SD Card	N/A
Reliability	Comprehensive lightning protection, 7 * 24 hours 65 °C high temperature stable and reliable testing
Intelligence analysis	NO
Other function	N/A
ONVIF	NO
Mobile monitoring	N/A
Power	DC5V-24V
Dimension	38mm*38mm+38mm*19mm
Other	Does not accept any custom.