

**SD-MA4110UA-X18R
AHD IR SPEED DOME CAMERA**



Product Features:

1. Adopt high performance sensor, image clear, soft.
2. Support IR-CUT, Day-night surveillance, realize Day & Night surveillance, No color cast, distortionless.
3. AHD-M@AHD video output.
4. Transmission distance reach to 500m.
5. Need to connect to back-end AHD DVR;
6. Support ultralow illumination.
7. Auto electronic shutter, applied in different surveillance environment.


Application:

Applied in different surveillance location such as corridor, large gymnasium, meeting room, waiting room, etc.

Order Item:

SD-MA4110UA-X18R

Shell Size:

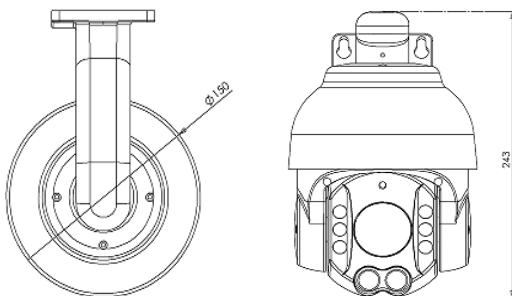

Specification

Model	SD-MA4110UA-X18R
Camera	
Image sensor	1/3" APTINA CMOS
Signal System	AHD-M@AHD
System standard	PAL/NTSC
Image pixel	1280*720
Minimum Illumination	Color 0.01Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.001 Lux @ (F1.2,AGC ON),0 LUX with IR
WDR	Digital WDR
DNR	2D/3D
Electronics Shutter	1/1 - 1/10,000s
Day&Night	Support IR-CUT
Lens	
Focal length	4.7 to 84.6mm (F1.5-3.6)
Optical Zoom	18x
Function	
IR LEDS Distance	30m
P/T Range	Level: 0°~360°continuous rotation, Vertical: 0°~90° automatic turning180°continuous monitoring
Preset point	50
Auto Mode	support 4 lines auto cruiser
Video in/out	
Analog interface	1.0Vpp / 75Ω, NTSC/ PAL, BNC
RS485 Control	Half-duplex mode, support PTZ control and online upgrade, protocol support: Chinese security industry protocols, Pelco P / D, protocol support automatic recognition
General	
Power supply	DC 12V
Working environment	Temperature-10~60℃; Humidity<90%
Dimension	Φ150mm*243mm
Weight	About 2.1Kg