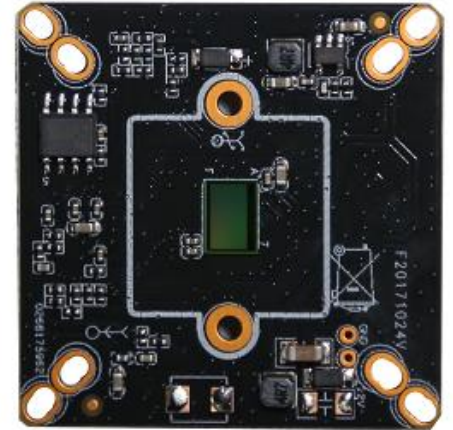


XAG-53X20PS-H

1080P Three in One Analog Video Camera Module

Key features:

- 1080P FHD resolution, the image is more clear and delicate;
- Zero-latency data transmission, full real-time, high fidelity;
- Long transmission distance, coaxial transmission up to 500 meters;
- Support UTC, enable OSD by the back-end;
- Support coaxial upgrade, version upgrade convenient and efficient;
- Support PIR function extension, can be connected with Passive Infrared Detection devices;
- Support XVI/AHD/TVI/CVI DVR;
- NTSC&PAL 2 in 1, easy to switch through back-end;
- High-definition quality products with competitive price.


Model:

XAG-53X20PS-H

Parameters:

Specifications	XAG-53X20PS-H
ISP	XM330
Sensor	1/2.7 inch SC2235 sensor
Signal format	XVI/TVI/CVI
Video Resolution	PAL/NTSC : 1920*1080
Minimum Illumination	color: 0.01Lux@ (F1.2, AGC ON) , 0Lux with IR
	Black & White: 0.001Lux@ (F1.2, AGC ON) , 0Lux with IR
Alarm Interface	can be connected with Passive Infrared Detection devices(PIR)
Photosensitive Resistance	1 photosensitive resistance interface, support the photosensitive resistor input signal and image, IR-CUT, infrared lamp linkage
Shutter	1/50(1/60) seconds to 1/10,000 seconds
Day and Night Function	Support IR-CUT
Lens Parameters	C/CS interface, M12 lens optional
Video output	1080P@25fps
Power	DC12V±10%
Temperature and Humidity	- 10 °C ~ 60 °C, humidity is less than 90% (no condensation)
Consumption	<5W
Size	Standard 38*38 positioning hole
Remarks	Support UTC,coaxial upgrade