


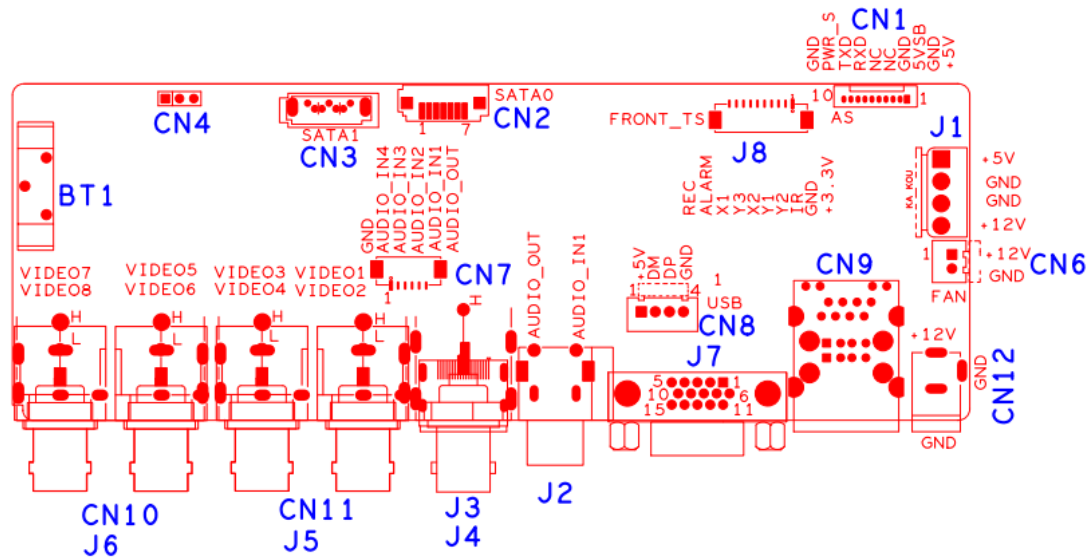

Socket	Function	Interface Description			
CN4	Debug UART	1:RX	2:TX	3:GND	
BT1	Battery seat				
CN3	SATA1				
CN2	SATA0				
J8	10PIN without MCU front panel socket	1: +3.3	2: GND	3: FRONT_IR	4: FRONT_Y2
		5: FRONT_Y1	6: FRONT_X2	7: FRONT_Y3	8: FRONT_X1
		9: ALARM	10: REC		
CN1	10PIN MCU front panel socket	1: +5	2: GND	3: +5_STB	4: GND
		5: NC	6: NC	7: X_UART1_SIN	8: X_UART1_SOUT
		9: PWR_S	10: GND		
J1	SATA power socket				
CN6	FAN power socket				
CN12	12V input				
CN9	2*USB+RJ45				
CN8	USB expansion seat				
J7	VGA				
J2	Audio seat	up: input	down: output		
CN7	Audio expansion seat				
J3	HDMI				
J4	CVSB				
CN11	BNC Video input	Right up:VIDEO01	Right down:VIDEO02	Left up:VIDEO03	Left down:VIDEO04
CN10	BNC Video input	Right up : VIDEO05	Right down:VIDEO06	Left up:VIDEO07	Left down: VIDEO08