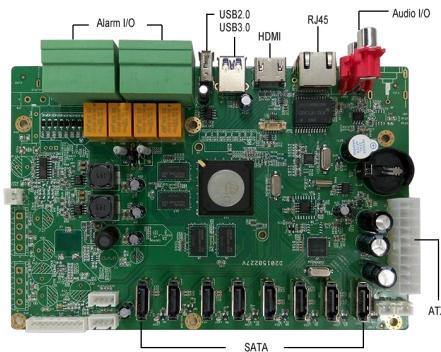


**NBD8064H8-P****Features:**

- support VGA HDMI 4K output;
- Support web, CMS, center platform management software MYEYE, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3G,WIFI,IP searches etc.);
- Visit remotely,built-in ARSP,achieve start up by one step.

**Technical Parameters:****Model: NBD8064H8-P**

	Model	NBD8064H8-P
System	Main processor	Hi3536
	Operating System	Embedded Linux
	System Resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Operator Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8/16/24/32/64
Video	Video input (IP)	16*4k/64*5M/24*5M/36*4M
	Video standards	PAL(625TVL,50f/s); NTSC(525TVL,60f/s)
	Video compression	H.265AI/H.265+(compatible H.265/H.264)
	Display quality	Max:4K
	Playback quality	5M/4M/1080P
	Decode	4*5M/9*4M/8*1080P
	Motion detection	Depend on camera
Audio	Audio compression	G.711A
	intercom	Support
Record & playback	Recording mode	Manual>Alarm>Video Detection>Continuous
	Local Playback	4*5M/9*4M/8*1080P
	Search mode	search by Time/calendar/event/channel
Storage &	Record Storage	HDD 、 network
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
Interface	Video output	1ch HDMI ,1ch VGA output
	Audio I/O	1/1
	Alarm I/O	16/4
	Network interface	1*RJ45 10M/100M /1000MAdaptive Ethernet port
	USB interface	1*USB2.0 port,1*USB3.0 port (Reserved 2 pre interface)
	Hard disk	8*SATA(Up to 8TB for each disk)
other	PTZ control	Control PTZ device by network, 1*RS485, 1*RS232
	ONVIF	Support
	Power supply	ATX
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0°C - +55°C , Humidity:10%—90%RH , Atm:86kpa—106kp
	dimension	192.5mm(H)*127mm(W)
	weight	Around 220g