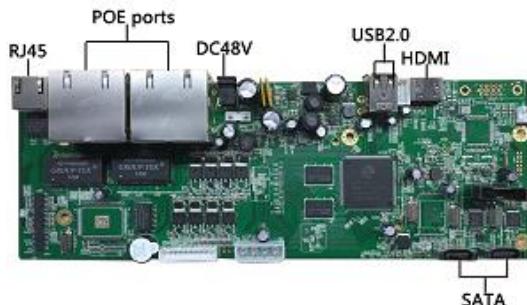


**NBD8908T-Q****Features:**

- support HDMI 4K output;
- Support web, CMS, center platform management software MYEYE, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3G,WIFI,IP searches etc.);
- Visit remotely,built-in ARSP,achieve start up by one step.

**Technical Parameters:****Model: NBD8908T-Q**

	<b>Model</b>	<b>NBD8908T-Q</b>
System	Main processor	Hi3798M
	Operating System	Embedded Linux
	System Resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Operator Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8/16
Video	Video input (IP)	4*5M/8*4M/4*3M/16*960P
	Video standards	PAL(625TVL,50f/s); NTSC(525TVL,60f/s)
	Video compression	H.265/H.264
	Display quality	Max:4K
	Playback quality	5M/4M/3M/960P
	Decode	2*5M/2*4M/4*3M/4*960P
Audio	Motion detection	Depend on camera
	Audio compression	G.711A
Record & playback	intercom	Unsupport
	Recording mode	Manual>Alarm>Video Detection>Continuous
	Local Playback	2*5M/2*4M/4*3M/4*960P
Storage &	Search mode	search by Time/calendar/event/channel
	Record Storage	HDD 、 network
Interface	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video output	1ch HDMI HD output(can be extended to support VGA)
	Audio I/O	0/0
	Alarm I/O	0/0
	Network interface	1* 10M/100M Adaptive Ethernet port,8 POE ports
	USB interface	2*USB2.0 port
other	Hard disk	2*SATA(Up to 8TB for each disk)
	PTZ control	Control PTZ device by network
	ONVIF	Support
	Power supply	48V/2.5A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0°C~+55°C , Humidity:10%~90%RH , Atm:86kpa~106kpa
	dimension	248mm(H)*172mm(W)
	weight	Around 150g