


IVG-85HF30PSD-ST
3.0M Double light illumination H.265 AI IP Camera Module
Features:

- Supporting human detection, face detection, and support to customize other intelligent functions
- 3.0MP HD Black light illumination resolution, clear and fine images;
- Support 2D/3D noise reduction, digital wide dynamic;
- Advanced H.265AI/H.265+ (Compatible with H.265/H.264) video compression, Super low rate, high definition quality of image;
- Professional anti-lightning, conform to GB/T17626.5 and IEC61000-4-5.
- Support ONVIF; access third party;
- Support various mobile monitoring (iPhone, Android);
- Provide web、CMS、center platform management software MYEYE, provide SDK development
- Support cloud technology, easy to achieve network penetration, fro in-line and alarm information pushed


Parameters:

Model	IVG-85HF30PSD-ST
System structure	Embedded RTOS, dual-core 32bit DSP (Hi3516EV200), pure hard compression, watch dog
Sensor	3.0M 1/2.8" SC4239H Black light illumination CMOS sensor, color 0.0001Lux@F1.2, black/white 0.0001Lux@F1.2
Video compression	H.265AI/H.265+ (Compatible with H.265/H.264) support dual stream, AVI; 0.1M~8Mbps variable; 1~30f/s variable
Image output	Main stream: 2304*1296@20fps, 1920*1080@25fps; sub-stream: 800*448@25fps, 704*576@25fps, 640*360@25fps
Shutter	1/50(1/60)s to 1/10,000s
Lens	N/A
Day and night	Support IR-CUT, IR-CUT coil has an internal resistance of 20 ohms, the power-on time is less than 200ma, and the voltage is 3.5V-6V
Noise reduction	Support 2D/3D
Wide dynamic	Support digital Wide dynamic
Auto iris	N/A
Audio compression	G.711, support bidirectional talk, audio&video synchronization
Audio interface	1ch input, level: 2Vp-p, impedance: 1kΩ, support sound pick-up input; 1ch output, impedance: 16Ω, 30mw, support microphone
Network interface	1*RJ45 10/100M adaptive Ethernet port; support RTSP/FTP/DHCP/NTP/UPnP etc
Extension interface	Support external audio power amplifier, white light signal control, UART to expand other functions
Singal interface	One photo resistance interface, one IR-CUT interface, support photo resistance signal and IR-CUT links to IR
PTZ	N/A
Motor interface	N/A
Alarm I/O	N/A
WIFI interface	N/A
Reset interface	N/A
SD Card	N/A
Reliability	Comprehensive lightning protection, 7 * 24 hours 65 °C high temperature stable and reliable testing
Intelligence analysis	Supporting human detection, face detection, and support to customize other intelligent functions
Other function	Support WEB, OSD, live video transmission, motion detect and IO alarm, front-end storage/playback/download, and center reminder and image linkage, support JPEG capture; united remote client monitoring software、MYEYE; perfect SDK;
ONVIF	Support
Mobile monitoring	Support multiple mobile monitoring (iOS, Android)
Power	DC-12V/2A input, power consumption: ≤3W,
Dimension	38mm*38mm
Other	Support POE power supply, not support any custom, The drive voltage of the light board is at 3.3V

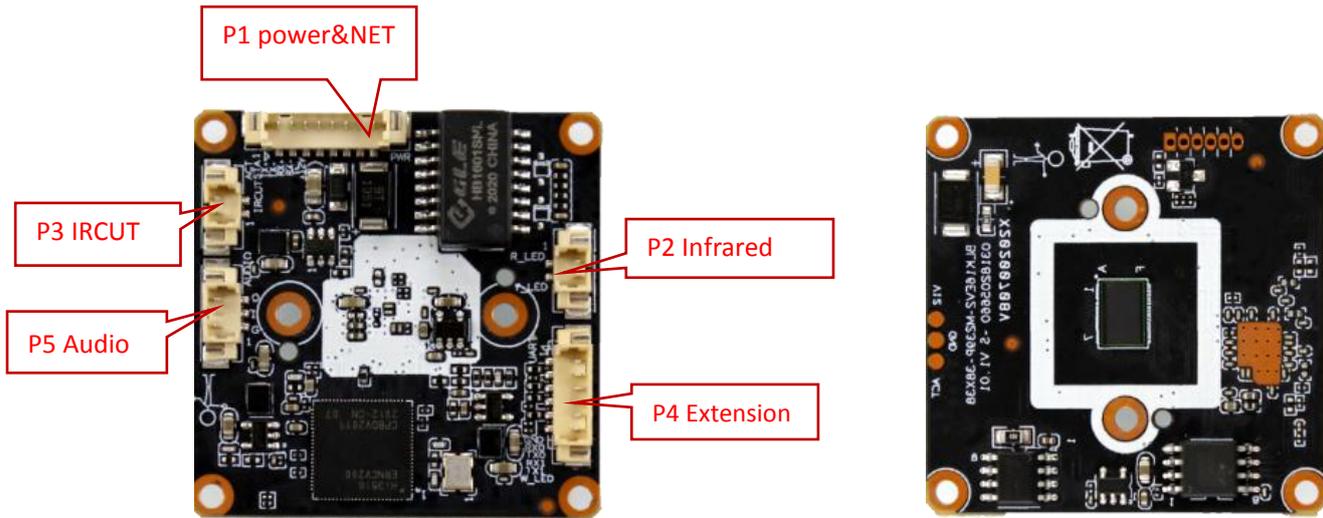

sign	Socket	Specific No	Interface Description	Function
P3	J4	1	IR-CUT	IR-CUT
		2	IR-CUT	IR-CUT
P5	J40	1	GND	GND
		2	AC_IN	Audio input
		3	AC_OUT	Audio output
P2	J41	1	IRIN	Infrared light signal control
		2	GPIO2_0	Infrared light control
P4	J44	1	GND	GND
		2	UART0_RXD	Debug Serial port accept
		3	UART0_TXD	DebugSerial port send
		4	UART1_RXD	Serial port accept
		5	UART1_TXD	Serial port send
		6	W_LED	White light control
P1	J1	1	ACT_LED	Indicator light
		2	STA_LED	Indicator light
		3	ETHTX+	ETHTX+
		4	ETHTX-	ETHTX-
		5	ETHRX+	ETHRX+
		6	ETHRX-	ETHRX-
		7	GND	GND
		8	+12V	12V input