

IPC-HE5120PES-IR2



Features


- HD 1080P resolution, image clarity, detail;
- Auto switch color to black/IR-CUT,achieve monitoring day and night;
- Various information superimposed(ID、 IP、 DDNS sever)
- Advanced video compression,super low rate and high definition image;
- Support multiple mobile remote monitoring (iOS, Android);
- Multi-browser access (IE, Chrome, Firefox, Safari);
- Auto electronic shutter time,adjust to different environment;
- Support web, CMS, center platform management software MYEYE, provide SDK Development.
- Support conform to ADVR/NVR,and support ONVIF;

Scenarios:

Apply to roads, warehouses, underground parking, bars, pipes, parks and other places.

Model:

IPC-HE5120PES-IR2

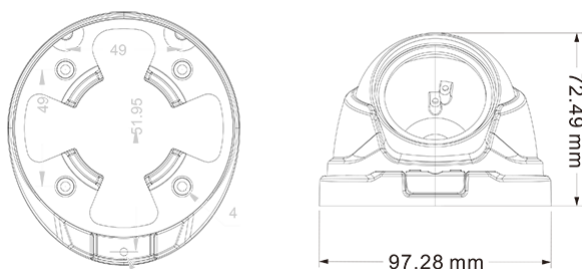

Parameters:

Model	IPC-HE5120PES-IR2
Camera	
Image sensor	1/2.7" CMOS sensor
Min.illumination	Color 0.1Lux @(F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	3.6mm@F2.0 (2.8mm,6mm optional)
Lens mount	M12
Day/night	Support IR-CUT
Compression	
Video	H.264,support dual stream,AVI;
Bite rate	32 Kbps~8Mbps
Audio	G.711A
Image	
Max.image	1920*1080
Frame rate	50Hz:1920×1080P@15fps;1280*720P@25fps
Image setting	Saturation, brightness and contrast are
Network	
Storage	Network storage
Intelligent alarm	Motion detection, video loss, cable
protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,
Basic	anti-flicker, dual-stream, heartbeat,
Interface	
Network	1 * RJ45 10M/100M adaptive ethernet
General	
Working	-10℃~60℃, humidity less than 90%
Power supply	DC12V±10%
Protection range	IP66
IR distance	IR lamb: 24 "IR2" :20-30 meters;
Dimension	Φ98mm*73mm
Weight	About 290g